

# TECH BRIEF

## Pneumatic Conveying Systems

Choosing a Pneumatic Conveying System: Pressure or Vacuum  
by Steve Grant, Hapman Product Specialist.

### The Differences and Similarities in Pneumatic Conveyors

Because they are efficient and inherently dust-tight, pneumatic conveying systems provide the most practical method for moving large quantities of dry materials, whether powdered, granulated, or pelletized. Pneumatic conveying systems, which use an air stream to move materials through horizontal and/or vertical piping, come in two forms: pressure or vacuum.


Pressure systems introduce compressed air at the system inlet in order to push the material through the piping; vacuum systems apply a vacuum at the delivery end in order to pull the material through the piping. Pressure and vacuum systems can be used for dense (high pressure/low velocity) or dilute (low pressure/high velocity) phase operation.

Dense phase conveying systems have a low air-to-material ratio. Velocities are below the saltation level, the critical velocity at which particles fall from suspension in the pipe. Dense phase systems, therefore, move the material through the piping in batches, with discrete dunes or plugs of material separated by pockets of air. Valving systems can be adjusted to reduce the air pockets.

Dilute phase conveying systems have a high air-to-material ratio. In this type of system, the material is most often fluidized, or suspended in the air flow, and moves at relatively high velocities depending on the particle size and density. Dilute phase systems usually deliver the material continuously. Material is constantly supplied at the pickup point and is conveyed to the receiver without interruption.

### Pressure Systems

The basic components of a pressure system are a rotary air lock feeder valve, a high pressure air compressor system or a low-pressure positive displacement blower or fan to serve as the power source. A pressure vessel, the conveying line, and the receiver make-up the balance of the system. Systems using high-pressure compressed air, operate with pressures above 15 psig, usually with a beginning pressure of about 45 psig and an ending pressure near atmospheric pressure. Low-pressure displacement blowers or fans supply a beginning pressure below 15 psig and an ending pressure near atmospheric pressure.

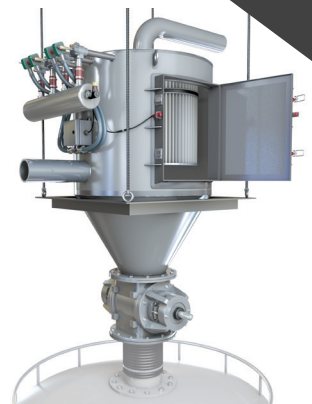

Hapman's Model 42 Vacuum Conveyor offers large capacity conveying, up to 360 cubic feet per hour.



LP Series low profile design allows the unit to fit in tight spaces where other filter receivers cannot.

First, the materials is charged into the pressure vessel through the rotary air lock. Once the pressure vessel is filled, the inlet and vent valves close and seal, and high-pressure air is gradually introduced into the pressure vessel. The high-pressure air conveys the material to the receiver, where the air and the material are separated by a filter or other system. Valves and sensors control the air pressures and velocities. When the predetermined low pressure setting is reached at the end of the conveying cycle, the air supply is turned off and the residual air volume purges the pressure vessel and the conveying line.

Pressure conveying systems are generally preferable when transporting heavier materials longer distances. Pressure conveying systems can be fairly costly, however, since they require special equipment, like a rotary valve to introduce material into the air stream at the inlet and extra components to remove the air at the discharge end through a vent system.

### **Vacuum Systems**

The basic components of a vacuum system are the pick-up nozzle, the conveying line, the receiver, and the vacuum generator, which is the power source. The vacuum generator creates the required negative pressure to pull the material through the conveying line and into the receiver. A number of devices, including a regenerative blower, a compressed air driven eductor (Venturi) unit, a plant central vacuum using liquid ring vacuum pumps or low-pressure blowers, or a positive displacement vacuum pump, can serve as the vacuum generator. The maximum negative pressure generated and the overall capability of the system, as well as the system efficiency and general operating characteristics, are determined by the type of vacuum generator used.

The air flow created by the vacuum generator moves the material through the conveying piping and into the receiver. There, gravity causes the material to drop into the receiver hopper. Internal filters separate the material from the air to remove any dust and protect the vacuum generator. Delivery of the material from the receiver to its final destination (e.g., process vessels or a packaging line) may be accomplished using a number of methods dependent on application suitability, including a dumpgate simple slide valves, pneumatically operated dump gates, or air lock rotary valves.

Vacuum systems are usually preferred for transporting materials that may tend to pack or plug in a pressure system. They are also a good choice when space is at a premium; for example, attaching a pressure system rotary valve in the limited space below a hopper rail car may be impractical. However, vacuum conveyors are not a good option if you need to transport materials long distances. Because they operate with pressures at

or below atmospheric pressure (14.7 psig), vacuum conveyors are limited to a maximum vertical distance of 50 feet and a maximum horizontal distance of 200 feet. The effective horizontal distance is also reduced by vertical distances and piping bends.

### Which System Best Suits Your Needs?

You will want to consult with one or more pneumatic conveying specialists before making your decision. However, you should prepare for your discussion by answering the following questions:

- What kind of material is being transported? Is material or piping degradation a concern?
- What is the purpose of the material transfer system?
- Do you simply want to move material?
- Do you want to transfer more material than your current system can handle?

**FIGURE 1**

### Pressure & Vacuum Conveying System Comparisons

SYSTEM TYPES			
SPECIFICATIONS	Dense Pressure	Dilute Pressure	Dilute Vacuum
Convey Velocities (ft./min.)	50	3600-5000	3600-5000
Convey Distance	High; around 1600 feet	Medium; around 650 feet	Low; optimal performance with convey distance limited to 200 feet
Operating Pressures (psig)	Initial: 45 Terminal: near atmospheric pressure	Initial: <15 Terminal: near atmospheric pressure	At or below atmospheric pressure; pressure drop through the system
Air-to-Material Ratio	Low air-to-solids ratio	High air-to-material ratio	High air-to-material ratio
Degradation	Use where product degradation or pipe erosion is a major concern	Use where degradation is not a concern	Use where degradation is not a concern
Best for These Types of Materials	<ul style="list-style-type: none"> <li>• Free-flowing</li> <li>• Granular</li> <li>• Pelletized</li> <li>• Uniform particle size</li> <li>• Non-cohesive</li> <li>• Non-compressible</li> <li>• Abrasive or non-abrasive</li> <li>• Fluidizable powders</li> </ul>	<ul style="list-style-type: none"> <li>• Lightweight</li> <li>• Non-abrasive</li> <li>• Fine</li> <li>• Granular</li> <li>• Low or high bulk density</li> <li>• Large light particle materials</li> </ul>	<ul style="list-style-type: none"> <li>• Lightweight</li> <li>• Non-abrasive</li> <li>• Fine</li> <li>• Granular</li> <li>• Low or high bulk density</li> <li>• Large light particle materials</li> </ul>

- Are you more concerned with reliability and efficiency, or gentleness of transport?

To answer these questions, you need to consider a number of material handling characteristics, including conveyability, optimum air-to-material ratios, buildup tendencies, flowability, and degradation. Figure 1 provides some guidelines to assist you in choosing the right system for the material you need to convey.

### Summary

Pneumatic conveying systems, whether pressure or vacuum are an excellent choice for providing efficient and dust-free conveying. And while pressure systems are preferred for conveying heavier materials longer distances, vacuum systems are the conveyor of choice for materials that have a tendency to pack or where physical space within the plant is limited. Because of the seemingly limitless variabilities in system requirements and diverse material bulk densities, designing an optimized system must first begin with identifying these elements with a qualified conveying expert. Taking into account the physical needs of the plant environment, the availability of plant air, and characteristics of the materials being conveyed will ensure that your pneumatic system is the best, most efficient and economical choice for your current and future needs.

## ABOUT THE AUTHOR

Steve Grant has been with Hapman since 1998, first as a regional sales manager before becoming the product specialist for pneumatic conveyors, bag dump stations, compactors and dust collectors in 2002. Steve believes in constant improvements to product which may result in ease of customer use and labor savings. Contact Steve at (269) 382-8223 or email [steve-grant@hapman.com](mailto:steve-grant@hapman.com)

## ABOUT HAPMAN

For 70 years, Hapman has provided manufacturing plants around the world with the most technologically advanced powder and bulk handling equipment and systems, offering custom engineered equipment and systems for chemical, food, pharmaceutical, plastics, building, minerals, and other industries.

**HAPMAN**

Ideas that move.



[sales@hapman.com](mailto:sales@hapman.com)  
[www.hapman.com](http://www.hapman.com)



5944 East N Avenue  
Kalamazoo, MI 49048  
(800) 427-6260